


## SAMSEN patio screen doors

# **How To Measure for**

# A Samson Sliding Screen Door

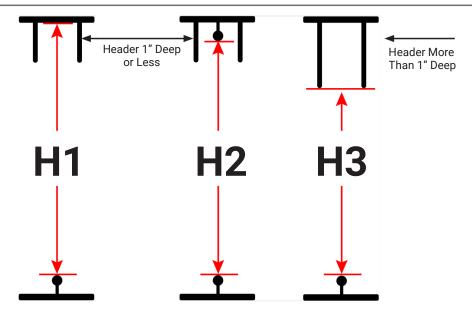

Standard roller width will accommodate a track up to .153" (the thickness of three dimes). If track is wider than three dimes, specify a Wide Roller when ordering.

# 1

### **MEASURE HEIGHT:**

Beginbyselecting the configuration to the left that best represents your track system.

### **H1 Configuration**

Measure inside header to bottom track and **subtract 1/4**"


### **H2 Configuration**

Measure from header track to bottom track and *add 1/4*"

### **H3 Configuration**

Measure from underside of header to bottom track and *add 1/2"* 

HEIGHT =

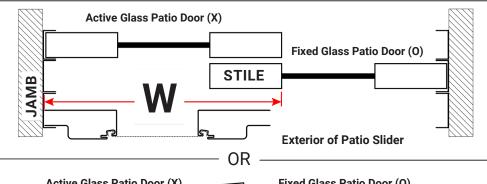


# Active Glass Patio Door (X) Fixed Glass Patio Door (0) CENTER MULLION Exterior of Patio Door


# 2

### MEASURE WIDTH:


Usingthe illustrations to the left, Measure from Jamb side of Operating Glass Patio Door to Stile of Fixed Glass Patio Door and subtract 1/2"

WIDTH = \_\_\_\_\_





### Always view configuration from Outside Looking In (OSLI)



3

### **CONFIGURATION:**

Using the illustration to the left to determine configuration. Always view configuration from the Outside Looking In (OSLI).

XO = Left Handle, OSLI OX = Right Handle, OSLI

CONFIGURATION = \_\_\_\_\_

www.metroscreenworks.com